


PERTAMINA FASTRON GOLD

SAE 5W-40

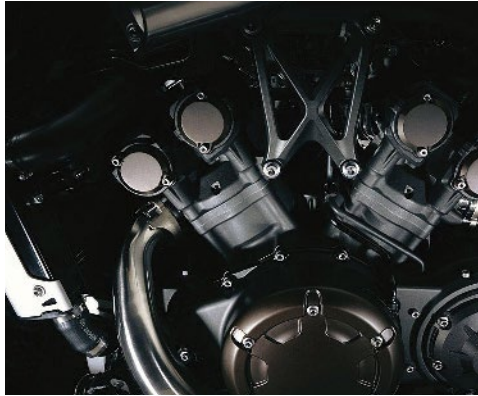

Characteristic	Test Method	FASTRON GOLD
SAE Viscosity Grade	-	5W-40
Appearance	-	Clear
Density at 15 oC, kg/l	ASTM D - 4052	0.8467
Kinematic Viscosity, α 40 μ C, c St	ASTM D - 7279	84.80
at 100 μ C, c St	ASTM D - 7279	14.57
Viscosity Index	ASTM D - 2270	180
ASTM Colour	ASTM D - 1500	L 3.0
Flash Point, oC	ASTM D - 92	240
Pour Point, μ C	ASTM D - 97	-33
Total Base Number, mgKOH/g	ASTM D - 2896	10

FASTRON GOLD SAE 5W-40 is a synthetic premium quality engine oil.

PERFORMANCE LEVELS FASTRON GOLD SAE 5W-40

meets below performance level:

- API SN/CF
- ACEA A3/B4
- MB-Approval 229.5
- BMW Long Life 01 (approved)
- VW 502 00/505 00
- Porsche A40
- Opel GM-LL-B-025
- Renault RN0700 and RN0710
- PSA B712296

SUPERIORITIES

- Offers optimum acceleration and excellent oxidation stability that gives durable performance in all driving condition; high speed, stop and go, or heavy traffic.

- Excellent shear stability and high performance additives provide engine cleanliness and maximum protection from excessive wear.
- Low evaporation level that gives low oil consumption and optimum lubrication.

APPLICATION

FASTRON GOLD SAE 5W-40 is highly recommended for the latest car generation from the leading car manufacturers, that operate under extreme condition.

HEALTH AND SAFETY

Please contact our Lubricants Marketing Head Office,

Phone: 62-21 3190 7190-95.

Fax : 62-21 3148884/601

Website: www.pertaminalubricants.com or

Email: hsse.ptpl@pertamina.com

to get Material Safety Data Sheet as information for Health and Safety Protection at work.