


# PERTAMINA FASTRON XP SERIES

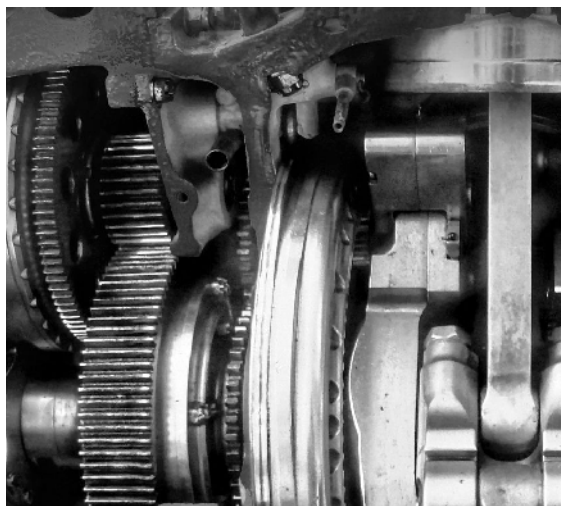

Chara	Test Method	FASTRON XP 10W-40	FASTRON XP 15W-40
SAE Viscosity Grade	-	10W-40	15W-40
Density at 15 oC, kg/l	ASTM D - 4052	0.8626	0.8627
Kinematic Viscosity, at 40 °C, cSt	ASTM D - 7279	96.85	99.11
at 100 °C, cSt	ASTM D - 7279	14.87	14.49
Vicosity Index	ASTM D - 2270	161	151
ASTM Colour	ASTM D - 1500	L 2.0	L 2.5
Flash Point, oC	ASTM D - 92	240	252
Pour Point, °C	ASTM D - 5950	-30	-24
Total Base Number, mgKOH/g	ASTM D - 2896	7	7

**FASTRON XP SERIES** is a high performance passanger car engine oil.

### PERFORMANCE LEVELS

**FASTRON XP SERIES** meets the performance level of API SN/CF.

### SUPERIORITIES

- Excellent oxidation stability that gives durable performance.
- Provides engine cleanliness and protection from excessive wear.

### APPLICATION

**FASTRON XP SERIES** is highly recommended for modern car generation from the leading car manufacturers, that operate under extreme condition.

### HEALTH AND SAFETY

Please contact our Lubricants Marketing Head Office,

Phone: 62-21 3190 7190-95.

Fax : 62-21 3148884/601

Website: [www.pertaminalubricants.com](http://www.pertaminalubricants.com) or

Email: [hsse.ptpl@pertamina.com](mailto:hsse.ptpl@pertamina.com)

to get Material Safety Data Sheet as information for Health and Safety Protection at work.