


PERTAMINA **TURALIK** 41, 43, 48, 52, 69



HIGH PERFORMANCE HYDRAULIC OIL FOR MAXIMUM PROTECTION

TURALIK Series are industrial hydraulic oil formulated from high quality, High Viscosity Index (HVI) mineral base oil which contains performance additive in order to provide excellent wear control, foaming prevention, rust and corrosion protection.

TURALIK Series meet industrial hydraulic equipment requirement or specification such as MAG Cincinnati Machine P-68 (approved for Turalik 43), P-69 (approved for Turalik 52) and P-70 (approved for Turalik 48), Denison HF-O, HF-2 (approved for Turalik 43, 48, 52) and Vickers I-286S and M-2950-S.

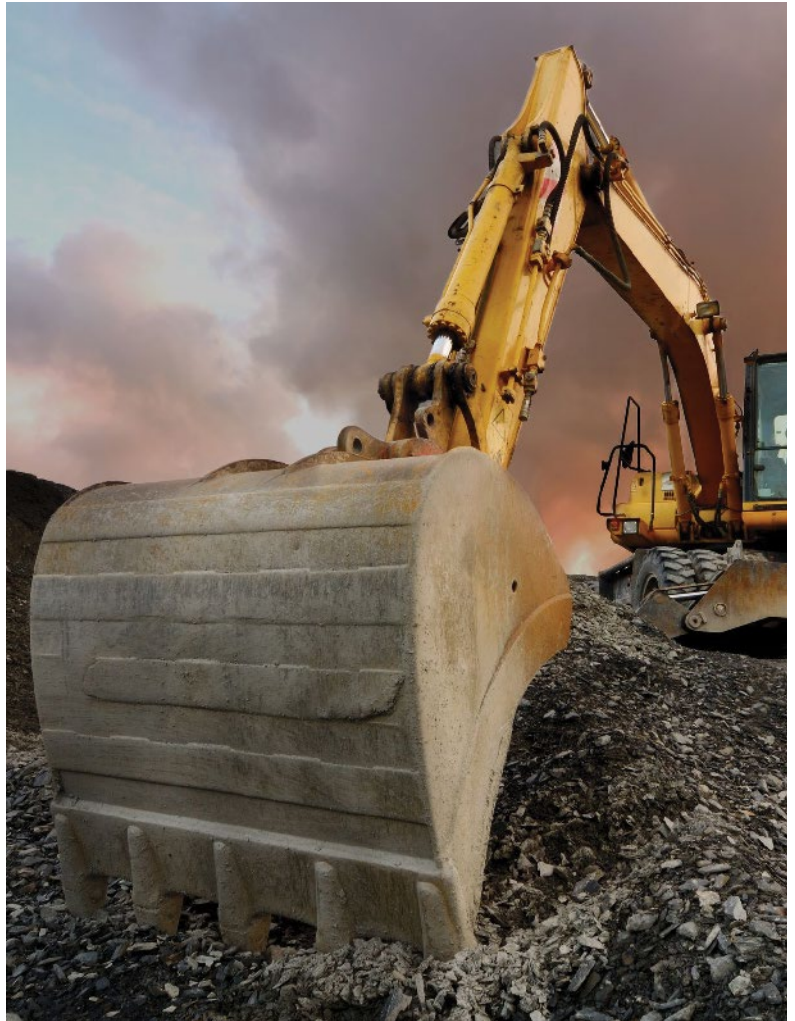

APPLICATIONS

TURALIK Series are recommended for general hydraulic equipment, also for circulating or oil baths lubrication systems. They should not be used with silver plated components.

SUPERIORITIES

- Good wear characteristic against metal to metal contact to extend hydraulic system life.
- Excellent oxidation and thermal stability that extend the oil drain interval.
- Provide better protection against corrosion, deposit, and sludge to produce optimum hydraulics performance and cleaner system.
- Capable to prevent the foaming formation.
- Exhibit excellent filterability, air release, and water separation properties.